


Schalldämpfer-Einsatz

LSE

Schalldämmwerte

f (Hz)	125	250	500	1000	2000	4000	8000
DI (dB)	5	11	21	30	40	42	32

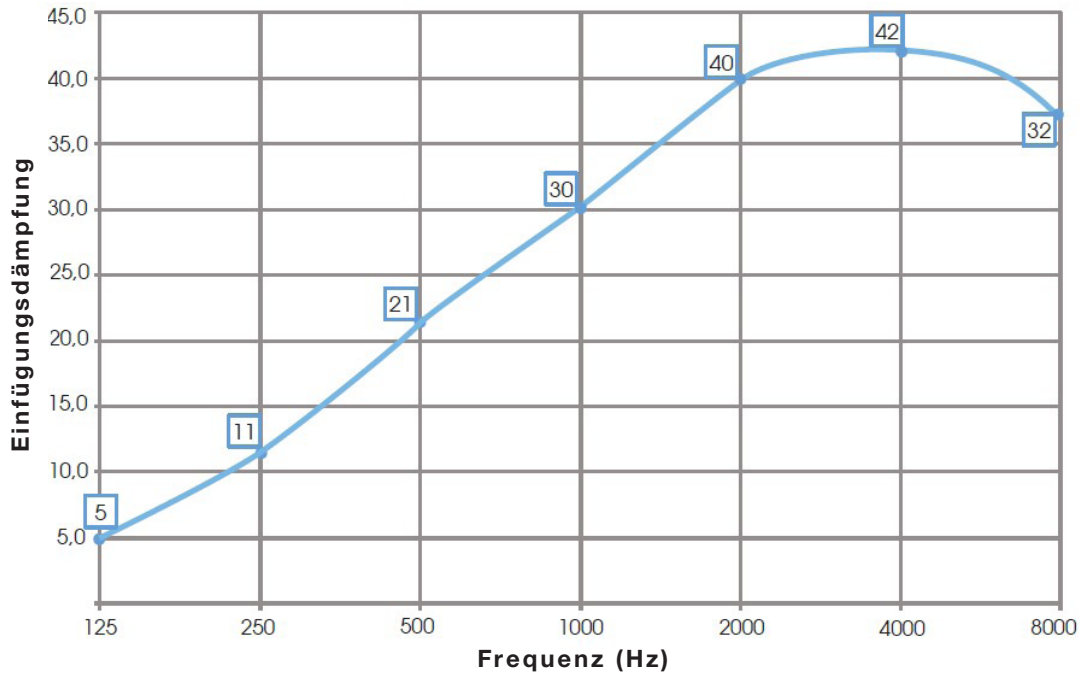

Druckverlustdiagramm

