

Circular straight silencer

SLUSS2 100



Description


SLUSS2 100 is a circular straight silencer with a connection diameter available between 315 - 800 mm. For smaller sizes, see SLUSS2 50.

Nominal insulation thickness 100 mm. Attenuation material is mineral wool. The SLUSS2's are made of an outer spiral seamed tube and an inner tube made of perforated sheet steel. The space between them is filled with mineral wool and a fibre cloth is inserted between the perforated sheet metal and the attenuation material, to prevent damage to the insulation material and fibers from getting into the duct system.

Tested according to ISO 7235 standard.

SLUSS2 100 is tested with the whole Lindab smoke evacuation system according to EN 1366-9.

Technical data

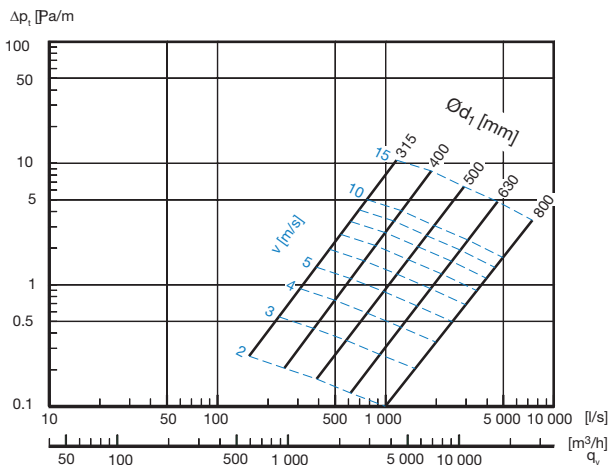


Order code

Product	SLUSS2	aaa	bbbb	100
SLUSS2				
Connection dim. $\text{Ø}d_1$ nom				
315 - 800 mm				
Length in mm (l_{nom})				
600 - 1500 mm				
Nominal Insulation thickness				
100 mm				

Example: SLUSS2 - 315 - 1200 - 100

Dimensions and sound data

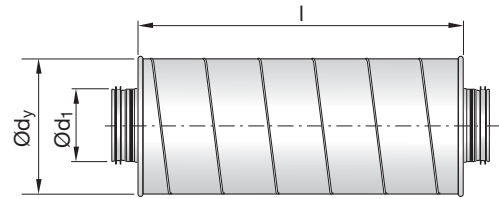

$\text{Ø}d_1$ nom [mm]	l_{nom} [mm]	Insertion loss [dB] for centre frequency [Hz]								$\text{Ø}d_y$ [mm]	l [mm]	m [kg]
		63	125	250	500	1k	2k	4k	8k			
315	600	2	5	9	14	12	6	4	5	510	600	12,0
315	900	3	6	13	20	19	10	6	7	510	900	18,0
315	1200	4	8	16	27	25	15	9	10	510	1200	24,0
400 *	600	4	5	8	10	7	4	4	6	625	600	16,0
400 *	900	4	5	10	17	13	6	6	8	625	900	22,0
400 *	1200	6	6	13	24	18	8	7	10	625	1200	32,0
500 *	900	4	4	10	14	8	4	6	6	735	900	26,0
500 *	1200	3	5	11	21	12	6	7	9	735	1200	39,0
630 *	900	2	3	7	12	5	4	4	5	880	900	44,0
630 *	1200	2	4	8	17	7	4	5	7	880	1200	56,0
800 *	1200	2	3	8	11	5	4	5	6	1030	1200	69,0
800 *	1500	2	3	10	16	6	5	6	7	1030	1500	86,0

* Supplied with two loose couplings (Type NPU).

There is given max. attenuation values of 50 dB in the table above.