


Roof hood

HVR



Dimensions

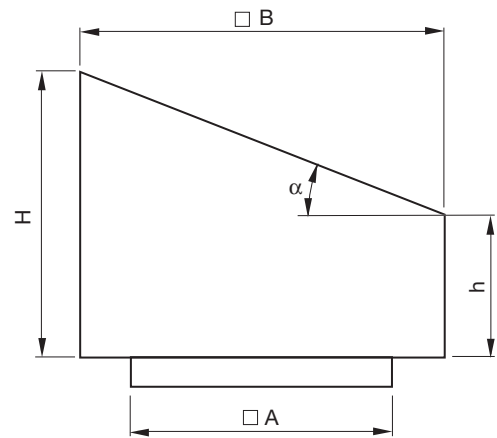

Description

Rectangular roof hood with angled upper side intended for outdoor air and extract air. HVR is designed for positioning above the outer roof on the roof through connection. The air runs both on the top- and downside of the hood. This is valid both for outdoor and extract air. The hood is free-draining downwards.

Can also be supplied with a pest-proof mesh.


HVR is manufactured as standard from galvanised steel sheet Z275, but is also available in stainless steel sheet 1.4301, stainless acid-resistant steel sheet 1.4404 or painted.

HVR is available with different angles in order to be in harmony with the architectural design of the building.

Sizes 7 and 9 are supplied with four twistable lifting and anchoring wire-loops. An individual anchoring eyelet must not be subjected to forces in excess of 1 500 N.

Size	A mm	B mm	h mm	H mm	m kg
3	400	450	150	410	6,40
4	500	550	205	525	9,90
5	600	750	300	735	17,0
7	800	1050	450	1060	34,3
9	1000	1350	575	1360	67,5

Technical data

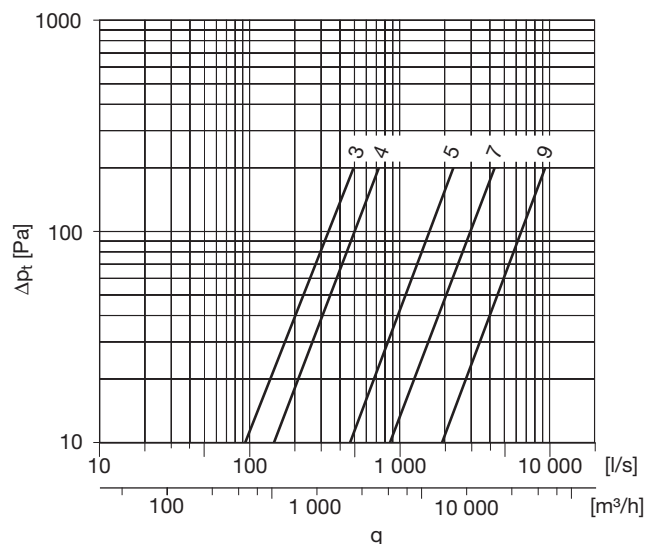

Ordering example

Product	HVR	3
Size		

Specify separately if the hood is to be supplied with a pest-proof mesh from the factory and if a special angle is required.