

# Réduction


# RCU



## Description

Réduction conique concentrique emboutie générant une faible perte de charge et peu de bruit.


## Dimensions

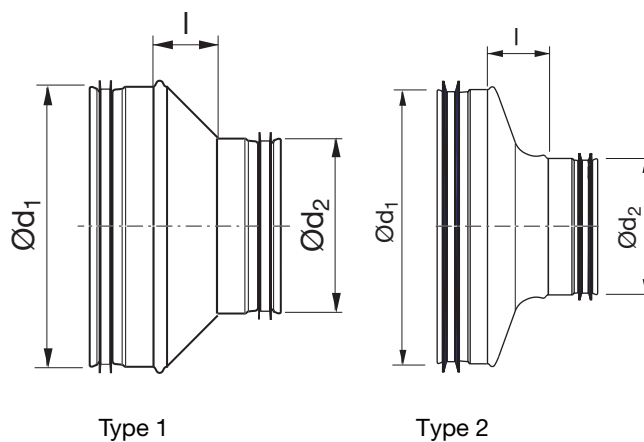

Ød <sub>1</sub> nom	Ød <sub>2</sub> nom	l [mm]	Type	m kg
100	80	26	2	0,18
125	80	36	2	0,16
125	100	27	2	0,21
160	80	55	1	0,31
160	100	46	2	0,17
160	125	35	2	0,22
200	100	46	2	0,22
200	125	55	2	0,30
200	160	39	2	0,29
250	125	70	1	0,62
250	160	60	2	0,46
250	200	42	2	0,46
300	200	59	2	0,64
315	160	91	1	0,86
315	200	74	1	0,72
315	250	50	1	0,65
355	250	69	1	1,08
355	315	33	1	0,99
400	200	118	1	1,37
400	250	94	1	1,38
400	315	54	1	1,29
500 *	250	128	1	2,30
500	315	95	1	1,90
500	400	68	1	1,76
630 *	315	160	1	3,37
630 *	400	118	1	3,17
630 *	500	68	1	2,89

\* Fabriquée manuellement

## Codification


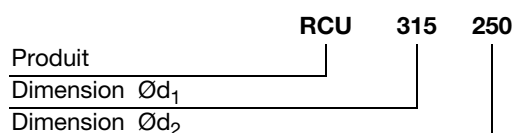


# Réduction



# RCU

## Caractéristiques techniques

1

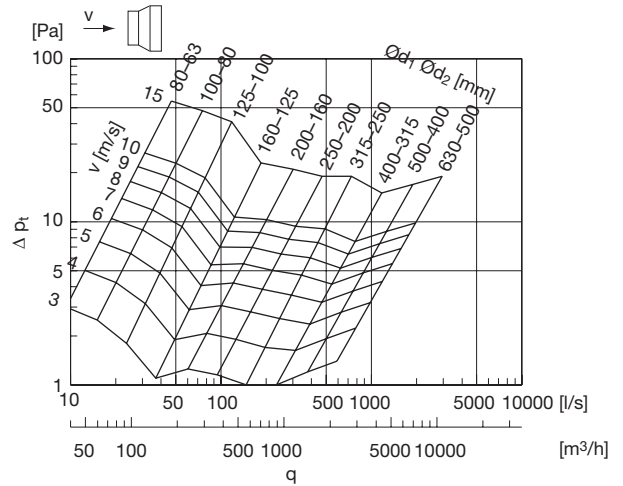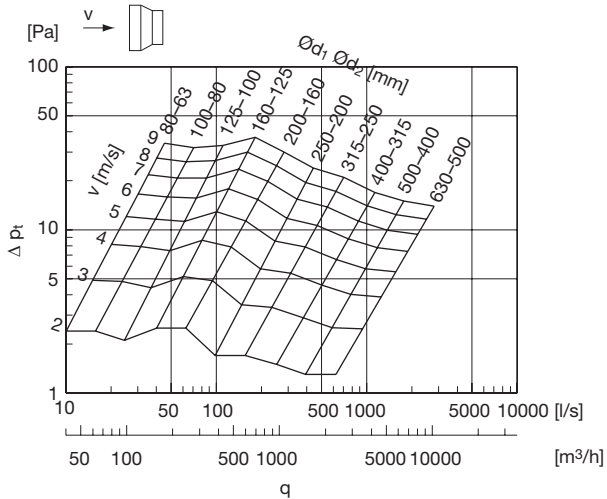

2

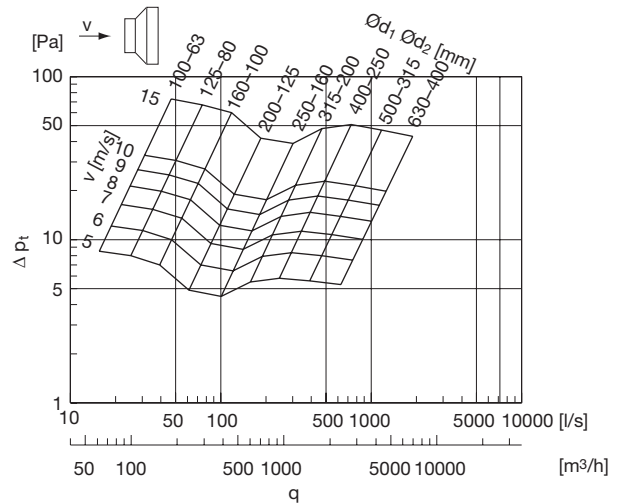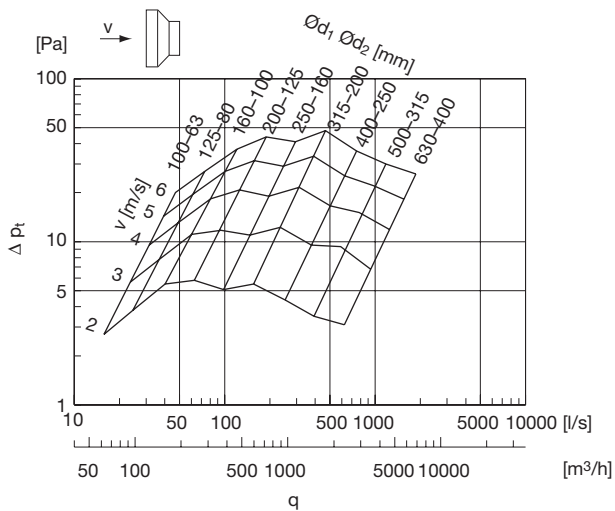

3

